

**FEATURES****Two Years Warranty**

- Display 3-½ or 4-½ (Any One) digits LED (Red)
- Accuracy +/- 0.5% of fs
- Range 0-1000V A. C.
- Available for various PT ratios
- Depth 105mm
- Mounting: Flush

**FEATURES OF 3 1/2 DIGIT METER****3-½ Digits Red LED Display**

Accuracy	ACV 0.5% Rdg +/- 3 Dgts DCV 0.1% Rdg +/- 2 Dgts
Dimension	96 mm x 96 mm (Bezel) 72 mm x 72 mm (Bezel)

**Special Adaptors to convert 96 x 96 mm sq size meters to 144 x 144 mm sq size meters are also available upon request**

**FEATURES OF 4 1/2 DIGIT METER****4-½ Digits Red LED Display**



Accuracy	ACV 0.5% Rdg +/- 3 Dgts DCV 0.1% Rdg +/- 2 Dgts
Dimension	96 mm x 96 mm (Bezel)

**Special Adaptors to convert 96 x 96 mm sq size meters to 144 x 144 mm sq size meters are also available upon request**

**SPECIFICATIONS**

Display	14/12 mm H, Red Led
Sampling time	Abt. 0.4 Sec typically
Frequency Range	45-400 Hz for AC range
Over Range Indication	"1"
Polarity	only "-" Display
Aux supply source	230V/110V/50/60Hz 'OR' 24 - 110V DC (Any One)
Power Consumption	AC 5VA
Operating temperature range	0 ~ 50°C
Storage temperature range	10 ~ 70°C
Max relative humidity	95%
Dielectric strength	AC 2KV/1Min

**Note: T-RMS versions and meters with Data Hold Functions also available upon request.**

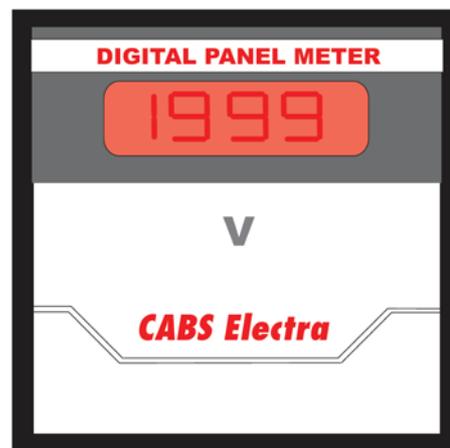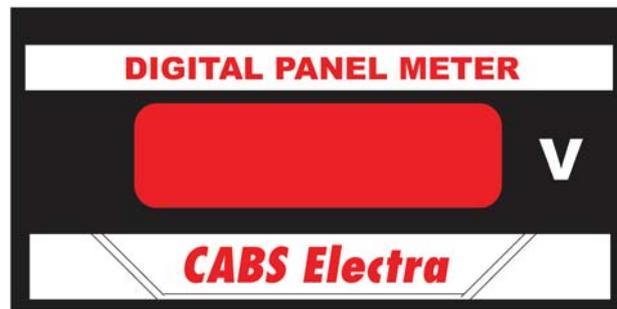

\*Technical Specifications & Appearance are subject to change without prior notice